




INSTALLATION INSTRUCTIONS
For
T-107K2.5 MOUNTING HARDWARE KIT

PARTS NEEDED:

41-230	SAFE T PLUS unit (Blue)
T-107K2.5	Mounting Hardware Kit
consists of:	
55-107-3	Anchor Bracket
55-214	Tie Rod Bracket
12-38-1625K	1 5/8 U-Bolt Kit
16-900	1" Spacer (2)
10-5-200	9/16 x 2" Bolt (2)
10-8-400	4" Bolt (2)
14-500	9/16" Locking Nut (2)
15-550	9/16" Flat Washer (2)

- Step ①. Set front wheels of vehicle to a straight-ahead position. **This is IMPORTANT.** Later adjustment of the Tie Rod Bracket may be avoided if front wheels are set perfectly straight.
- Step ②. Find steering box and hold bracket up for best clearance. (Holes should be drilled at 1 3/4" from bottom of steering box and 1" and 3" from the passenger side front of steering box) Mark holes.
- Step ③. Drill 9/16" holes into steering box.
- Step ④. Mount 55-107-3 anchor bracket on passenger side using 9/16" bolts, flat washer, locking washer and nut. Tighten nuts securely.

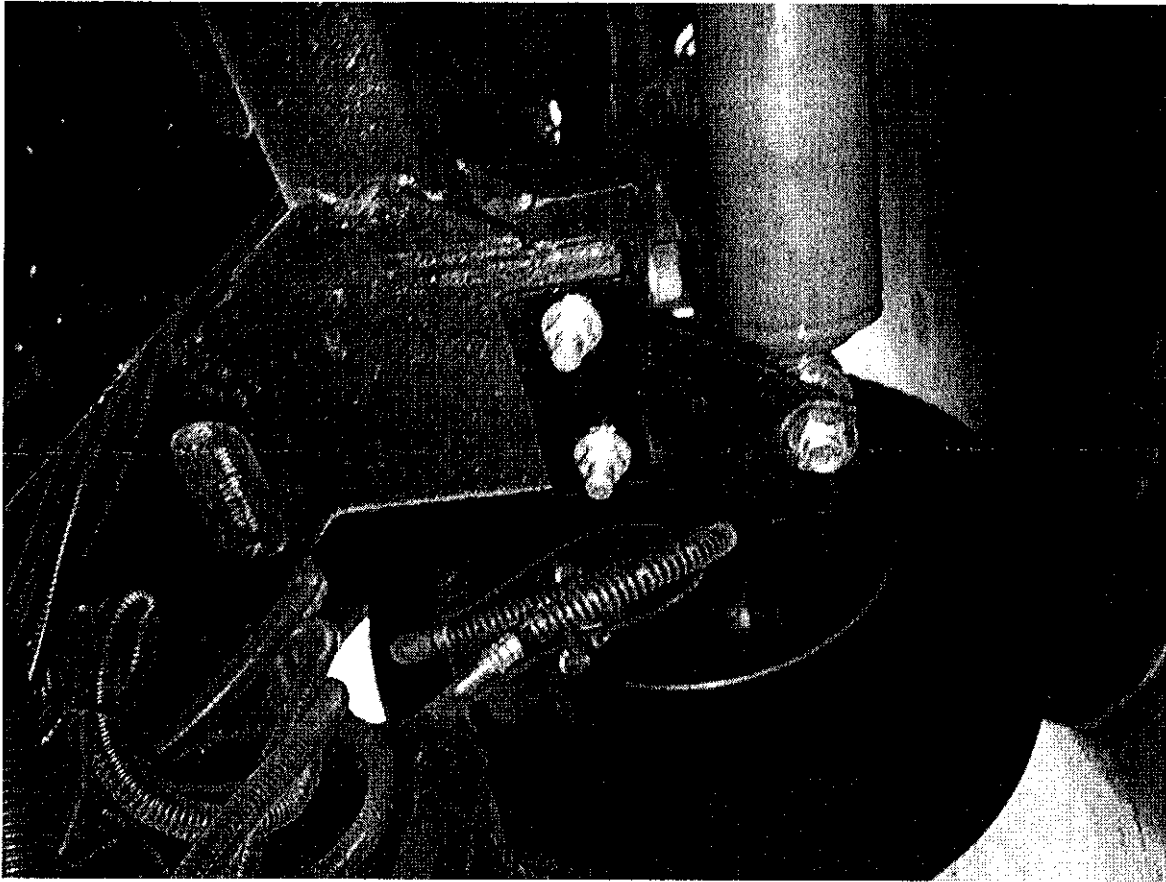

- Step 5. Mount 55-214 tire rod bracket onto tire rod using provided U-Bolts.
- Step 6. a) Install large end of SAFE T PLUS Unit to bottom of Anchor bracket
b) Install small end of SAFE T PLUS unit to bottom of Tie Rod Bracket with bolt, nut, & washer provided.
- Step 7. a) Tighten the unit bolt on Anchor Bracket to **80-90 foot pounds** of torque.
b) Tighten the U-Bolts on the Tie Rod Bracket to **20 foot pounds** of torque
c) Finally; tighten the unit bolt on the Tie Rod Bracket to **80-90 foot pounds** of torque.
- Step 8. **ROAD TEST & ADJUSTMENT PROCEDURES:** See attached documents.

FOR TECHNICAL ASSISTANCE:

☎ (800) 872-7233

✉ support@safe-t-plus.com





Road Test & Centering/Adjustment Procedures

To ensure proper alignment and installation of the SAFE-T-PLUS unit, the vehicle should be road tested. Take along a **9/16" deep well socket wrench** to fit the U-bolts on the tie rod. While driving on a straight stretch of road, vehicle should easily follow a straight course, if not, adjustment is necessary.

To adjust Safe-T-Plus Steering Control follow the below instructions:

1. **After installation, test drive the vehicle**
2. Try to test with the most perfect conditions: straight road, no crown, limited wind (if possible), freeways seem to work best or large parking lots.
3. Hold steering wheel in a **straightforward position** to determine if the vehicle is tracking straight or pulling to the left or the right.
4. Stop vehicle, and set brakes.
5. Take note of where the steering wheel **must be held** to track straight down the road, and mark it accordingly. Pull in somewhere, and with the motor, steering pumps, all running. Have someone hold that steering wheel firmly in exactly the proper position.*
6. Underneath the vehicle, slightly loosen nuts on tie rod U-bolts and allow unit to self-center. tap the Safe-T-Plus unit a few times with your fist, or a rubber mallet, and let the internal spring push / pull the tie rod bracket into a neutral position. (Frequently this slight movement is not noticeable)
7. At this point, take a moment to square-up the U-bolts as they lay up and across the tie rod. If you've left them askew, they may pull the bracket out of position as they tighten.
8. **Retighten the U-bolt nuts (only 20 lbs. of torque)**
9. Now test drive again.
10. Repeat this step if necessary until vehicle will hold a straight line**

Note:

*Be mindful that if you are holding 2 to 3 inches of steering wheel against the spring to track straight, it's only 1/16 to 1/8 of an inch down below on the tie rod bracket.

**Repeat if necessary, until you're satisfied. Once completed you should be able to achieve holding your lane position for a 1/2 mile or so at freeway speeds, with hand gently resting on the steering wheel without correcting.

Extra Detail on Final Adjustments (Tips)

- Using tape, you can stick a ruler or pencil to the dash to act like a centering indicator for more accuracy.
- Another trick is marking the left and right limits of any inherent slop in the center of the steering wheel operation. At the shop, line up the center marks, and do the install.
- Be patient, be precise when moving the tie rod bracket, as just a 1/16 of an inch will make the difference in drifting off half a lane in 100 yards or less.

When making very small adjustments, (1 ½ inches of steering wheel displacement or less) it may be necessary to hold the steering wheel in the direction of correction just a little beyond the required (¼ to ½ inch more) in order to "load up" the internal spring just a little and let the unit help with the relocation of the tie rod bracket. There really isn't any other way to move the tie rod bracket without having some assistance holding the steering wheel while adjustments are being made down below.

If overshooting the desired results, mark a line a set distance from the tie rod bracket so that they can measure in what direction, and how far each adjustment was made.

A "how-to" properly center/adjust Safe-T-Plus Steering Control video is available on our website to help guide you through the adjustment procedures. Feel free to check out video at www.safe-t-plus.com (bottom right).



If you need additional assistance, please call us toll-free (800) 872-7233 or email us at support@safe-t-plus.com and technical support will be happy to assist.

SAFE T PLUS
Steering Control